

ADD63S **Two-Level Sensor System**

Introducing the NEW EXCLUSIVE Verity Two-Level Sensor System. Designed and engineered specifically for commercial vehicles. The detection is highly accurate at a range of 8 feet away on upper sensors and 10 feet away on lower sensors. Built with Verity quality.

SPECIFICATIONS (Part #ADD63S)

Feature:

- Easy-to-read obstacle location and distance to the obstacles.
- Self-diagnosing system with LED display readouts.
- Smart Sensors will learn to recognize most fixed obstacles on the truck near the sensors.
- IP69K waterproof sensors with locking collar.
- Only senses 12" over the truck reducing false readings.
- Sensors can be placed as low as 18" off the ground.

Upper Sensor Location 50cm

50cm

en


Lower Sensor Location

Patented display

Detection Range:

Top Sensor with angle ring 5°	8ft
Bottom Sensor with angle ring 15°	10ft
Angle of horizontal detection	>90°, <110°
Angle of vertical detection	>35°, <55°
Lowest install height of sensors	>18 inches



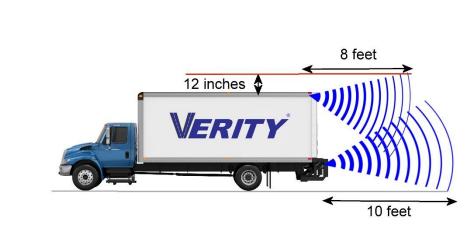

574-807-6002 Serving OEMs & Fleets www.veritysafe.com 56600 Twin Branch Dr., Mishawaka, IN 46545 A division of Component Solution Services, LLC.

Est. 2002

Subject to change without notice

Woman-Owned